

■ GECKO | FILLET WELDING CARRIAGE

Gecko is a portable mini fillet welder designed to produce consistent high-quality welds.

It features 4-wheel drive system with magnetic traction and a control loop feedback mechanism which provides speed stabilization in all welding positions.

Constant, continuous and repeatable travel speed enables weld bead geometry that is exact to the required specifications, thus reducing costly over welding and decreasing filler metal usage, substantially.

GECKO compact welding tractor weights only 8 kg (17 lbs).



■ Applications:

- Trailer manufacturing
- Truck tanks
- Oil tanks
- Water storage tanks
- Transformers
- Shipyards
- Any application demanding a long, continuous fillet weld





GECKO HS (High Speed)


New special version for specific applications is available now

GECKO HS (High Speed)

with increased horizontal speed up to 220 cm/min (86.6 in/min) is suitable for both speed welding and plasma cutting


-  Continuous welding
-  Dual torch welding
-  Horizontal speed 0–110 cm/min (0–43.3 in/min)
-  Vertical speed 0–100 cm/min (0–39.4 in/min)
-  Dual Arc Ignition
-  Min. path convex radius 1000 mm (3.5 ft)
-  Min. path concave radius 1250 mm (4 ft)
-  Weight 8 kg (18 lbs)

Versatility of applications including out-of-position use

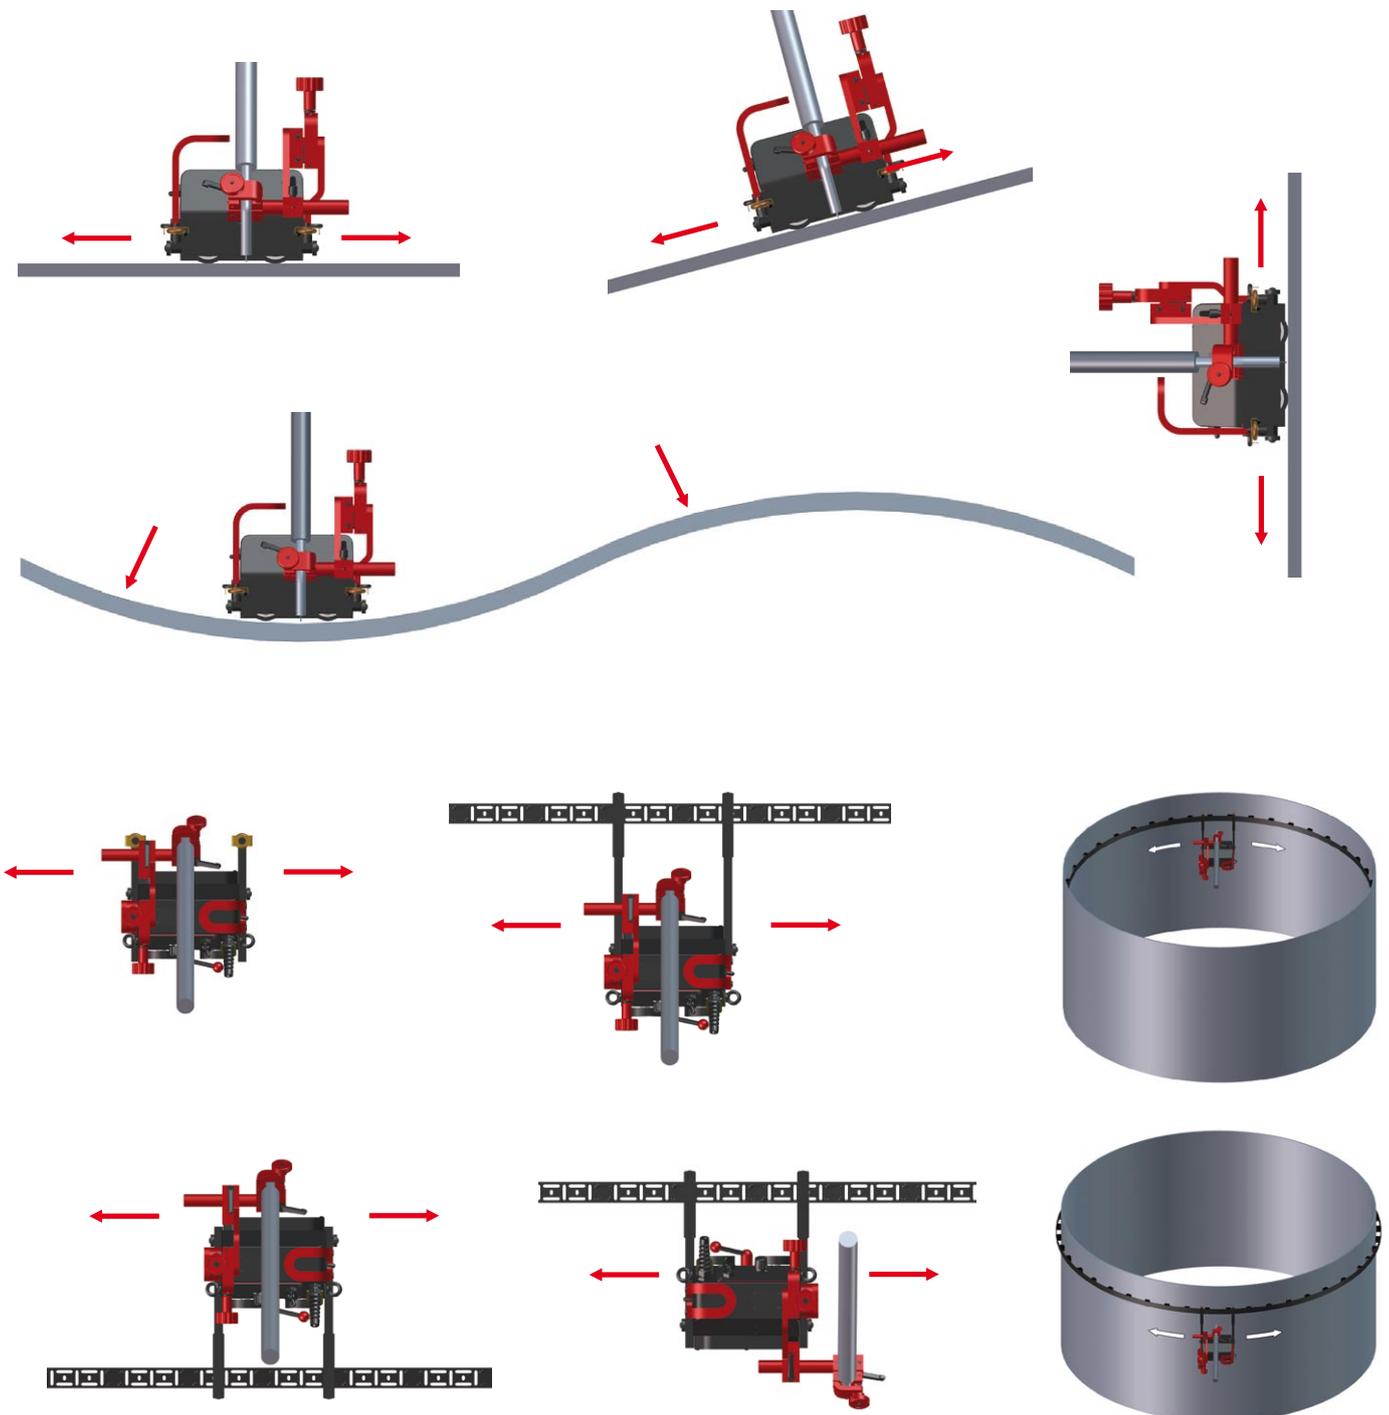

Primary features and benefits:

- Compact, lightweight design with durable aluminum cast housing
- Convenient Power Supply 115-230V 50/60Hz
- Positive magnetic traction permits out of position use
- Magnet on/off lever permits easy set up and adjustment on work piece
- Maintenance free 4-wheel drive with worm gear reduction
- Heat resistant silicone wheels
- Quick clamping Torch Holder mechanism for different types of MIG/MAG torches with diameters of 16-22mm (5/8" – 7/8"); optionally up to 35mm (1-3/8")
- Precise torch adjustment with screw drive cross slide
- Multifunctional LED display - presetting of travel speed, units (US, EUr), error codes information
- Closed loop speed control system stabilizes travel speed to reduce weld defects and costly rework
- Consistent heat input reduces distortion
- Reduced wasted filler metal – eliminates over welding
- Automatic ARC ON/OFF system initiates welding with travel, simultaneously
- Capable of carrying and controlling 2 torches
- Self-guiding roller arms eliminate the need for track
- Multi-surface guiding
- Improves working environment - removes operator from heat and fumes



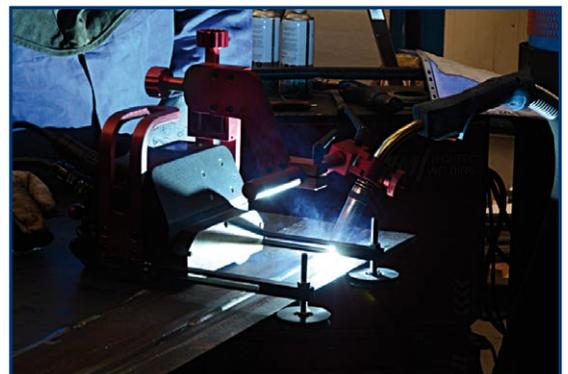




1. Drive unit with control panel
2. Magnetic adhesion release lever
3. Weld contact / Arc ignition socket
4. Power supply coupling
5. Adjustable guide arm
6. Quick clamp torch holder
7. Main power switch (0/I)
8. Cross slide assembly



Dimensions:

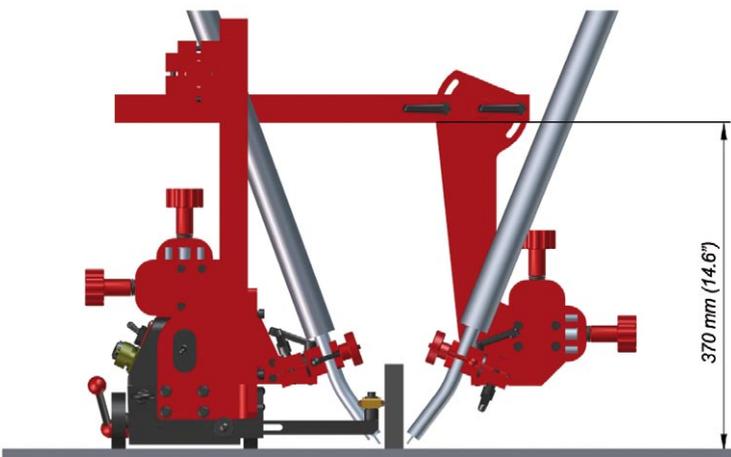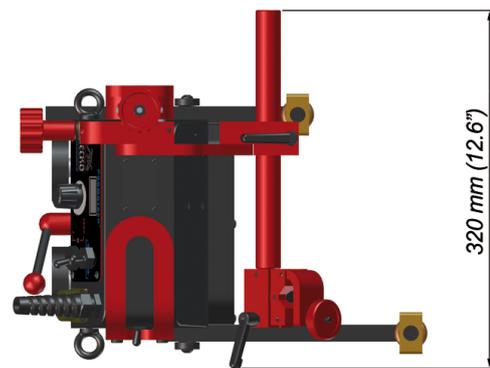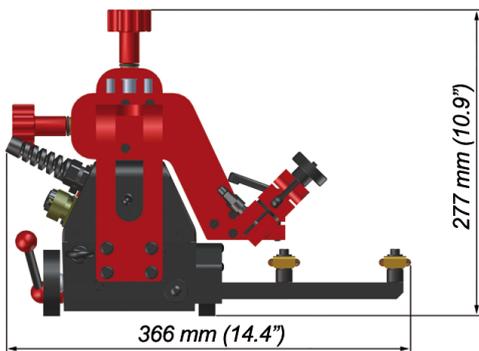

TECHNICAL SPECIFICATIONS		GECKO
Voltage		~ 115–230 V, 50–60 Hz
Power		20 W
Welding positions	horizontal	PA (flat), PB (horizontal vertical), PC (horizontal)
	vertical	PF (vertical up and down)
Minimum path convex radius		1000 mm (3.5 ft)
Minimum path concave radius		1250 mm (4 ft)
Torch diameter		16–22 mm (0.63–0.87"); up to 35mm (1.38") option
Minimum welding material thickness		4 mm (0.16")
Ground clearance		4 mm (0.16")
Horizontal pulling force		150 N
Vertical pulling force		100 N
Cross slide adjustment range		0–35 mm (0–1.38"), up down, L-R
Horizontal speed		0–110 cm/min; (0–43.3 in/min)
Vertical speed		0–100 cm/min; (0–39.4 in/min)
Weight		8 kg (18 lbs)

TECHNICAL SPECIFICATIONS		GECKO HS
Voltage		~ 115–230 V, 50–60 Hz
Power		20 W
Welding positions	horizontal	PA (flat), PB (horizontal vertical), PC (horizontal)
	vertical	dedicated to horizontal work
Minimum path convex radius		1000 mm (3.5 ft)
Minimum path concave radius		1250 mm (4 ft)
Torch diameter		16–22 mm (0.63–0.87"); up to 35mm (1.38") option
Minimum welding material thickness		4 mm (0.16")
Ground clearance		4 mm (0.16")
Horizontal pulling force		150 N
Vertical pulling force		dedicated to horizontal work
Cross slide adjustment range		0–35 mm (0–1.38"), up down, L-R
Horizontal speed		5–220 cm/min; (1.5–86.6 in/min)
Vertical speed		dedicated to horizontal work
Weight		8 kg (18 lbs)

Standard accessories



PRW-0466-06-00-00-0
Guide arm assembly with brass roller wheel



Power cord
3m (9,7 ft)



KBL-0466-17-00-00-0
Dual arc ignition cable
of 6.5 m (21 ft)



UCW-0466-04-00-00-0
Torch Holder Long
Rod Clamp Assembly

Optional accessories for multi-surface guiding and variety of applications



PRW-0466-41-00-00-0
Edge Following Guide Arms



PRW-0466-42-00-00-0
Adjustable Guide Arms



PRW-0466-50-01-01-0
Flexible track 185cm (6ft) 1pc



PRW-0466-50-02-00-0
Track following Guide Arms



BLO-0466-50-01-10-0
Magnet block 1 pc



ZRZ-0466-19-00-00-0
Torch clamp 22-35 mm



WLK-0476-20-01-00-0
Short Rod Clamp




PRD-0466-43-00-00-0
Torch Extension Arm



PRW-0466-52-00-00-0
Magnet guide arms



PDT-0466-40-00-00-0
Dual Torch Mount

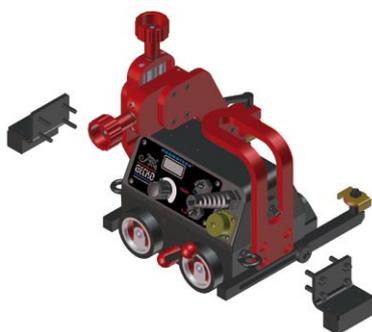

BLO-0466-44-01-00-0
Magnet blocks (front)
M5x25



BLO-0466-45-01-00-0
Magnet blocks (back)
M6x25

More information at www.promotech.eu



American Welding Society
Supporting Company Member

Mitglied im **DVS**
DVS – Deutscher Verband für Schweißen
und verwandte Verfahren e.V.



PROMOTECH Sp. z o.o.
ul. Elewatorska 23/1, 15-620 BIAŁYSTOK, POLAND
tel. (+48 85) 678 34 05, fax (+48 85) 662 78 77
marketing@promotech.eu www.promotech.eu

Your local dealer:

